

Modern Passenger Elevators for Mid-Rise Buildings

Elevate your Senses



PASSENGER ELEVATOR

ERO-5-MRL/MR

Better Technology Builds Better Elevator Systems

Engineered Reliability


Perfectly matched control and drive motor systems make installing and commissioning elevators simpler and quicker. Multi parameter monitoring systems ensure minimal down time and rapid trouble shooting. Computer modeling and extensive testing of components assure maximum safety and reliability.

Architectural Advantages

Compact machines allow for Mini MR or MRL to give architects and designers the power of choice to free up usable space and create beautiful building elevations.

Eco Friendly and Energy Efficiency

Energy-saving **Permanent magnet** motors, and state-of-the-art inverter drives produce precise speed control while reducing energy consumption to never before levels. Next generation processor and software technologies reduce wait times for passengers and reduce unnecessary running of lifts, increasing the service life of equipment while reducing cost of ownership.

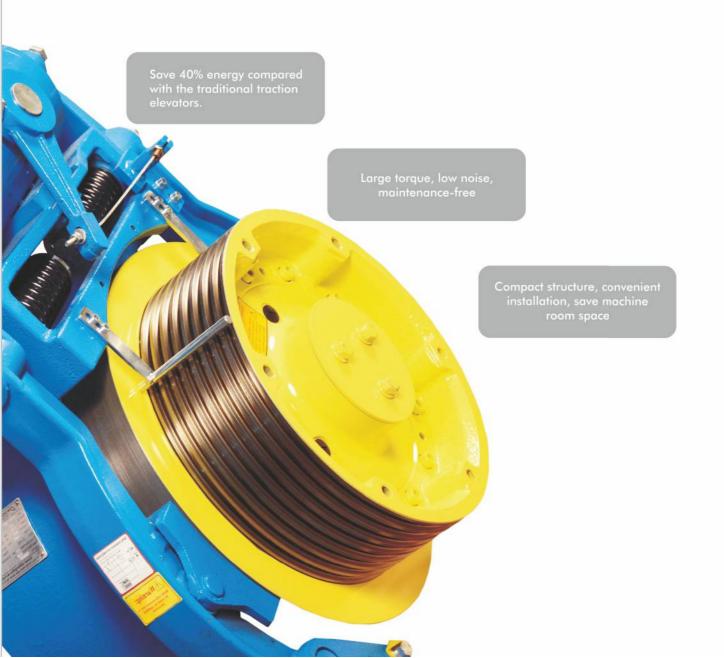



ESTD 1947

Technology Drives Elevator Performance

State of the Art Elevator Control Systems

High speed 32-Bit digital processors and CAN BUS technology guarantee maximum safety, fast response time and enable advanced features such as

- · Direct ramp to stop
- Self-learning functions to optimise wait times.
- · Fault diagnosis and emergency operation under fault detection.
- Advanced VVVF drives using sophisticated Heidenhain encoders and complex algorithms supply power to motors, consume minimal energy yet control elevator movement with incredible precision.

Whisper-Glide Elevator Ride and Door Performance

State of the art components designed with precise engineering and manufacturing tolerances impart to our elevators an unsurpassed ride quality and smoothness. Door operators with VVVF drives and contactless systems make for noise free reliable performance.










ERO-5-MRL

Save Machine Room Space and Empower Your Architectural Vision

Our Industry-Leading MRL solution incorporates an ultra-compact traction machine and other mechanical equipment neatly within the hoist way overhead space. An elegant control cabinet is fitted inside the front wall, adjacent to the top floor landing door.




Effectively save machine room area





ERO-5-MR

Our compact Mini Machine Room technology frees up space and eliminates cantilever construction while making convenient the servicing of equipment.



Effectively save machine room area






ESTD 1947

Passenger Cabins

Cabin Panel finish with choices of Powder Coated Steel, Hairline Stainless Steel or Mirror/ Etched Stainless Steel.







E18105

Celling : E58002 (Lighting decoration,

mirror St. St. frame)

Car Wall : Hairline St. St.

Floor : PVC

E18202

Celling : E58009 (Lighting Decoration, mirror St. St. frame with

down light at two sides)

Car Wall: St. St. hairline with central panel on all 3 sides of mirror finish or

etched.

Handrail: E77010 (Hairline st. st.)

Floor : PVC

E18706

Celling :E58017 (Hairline st. st.)

Car Wall : Rear wall (Center Panel of etched mirror finish and additional


panels of mirror finish side walls of st. st. hairline finish

Handrail: E77010 (Hairline st. st.)

Floor : PVC COP : E18303



E58002



E58009





ESTD 1947

Landing door



E20500

Door Model : E20500 Door Material : Hairline st. st. Narrow jamb : Hairline st. st.



E20520

Door Model : E20520 Door Material : Mirror etched st. st. Narrow jamb : Mirror st. st.



E20706

Door Model : E20706 Door Material : Mirror etched st. st. Narrow jamb : Mirror st. st.



E20709

Door Model : E20709 Door Material : Mirror etched st. st. Narrow jamb : Mirror etched st. st.



E20710

Door Model : E20710 Door Material : Mirror etched st. st. Narrow jamb : Hairline st. st.



E20722

Door Model : E20722

Door Material : Ti-gold etched st. st. Narrow jamb : Ti-gold Mirror st. st.



CAPACITY 13 PRES
LOADING 1000KGS
NO SMOKING

Signal Fixtures







Signalization

CAPACITY 13 PRES LOADING 1000KGS NO SMOKING

7" LCD Optional





Direction Lantern **E18501**





1

Standard SS Hairline finish Dot Matrix Display in Red Option SS Mirror finish Surface mounted LOP **E18401**

Standard Features						
Door Open & Door Close Buttons	Fire Emergency feature					
Alarm Button	Adjustable Home landing					
Overload Audio / Visual alarm	Full Load Bypass					
Automatic "OFF" for Car light and Fan	Car Call Cancellation					
Next Landing feature in case of non functioning of door	Next Floor Landing in case of Error (except power & Safety circuit)					
Stuck Button check	Phase Failure & Phase Reversal protection					
Battery Operated Emergency Car Light	Duplex Operation					
Automatic doors with full safety curtain	Customized Floor Designation					
Door Re-open feature from Landing button	Anti-Nuisance feature					
Repeated attempts for Door Closing	Parking Floor selection					
Adjustable Door Opening time at main Floor	Direct Landing for Single floor Run and Long run					
Full Height Light Curtain with Multiple Light Beams	Motor Overheat Protection					
Intercom 2 way	Night Security Floor					
Fault Data Recording						

Optional Features					
Relevelling Feature	Building Management System Interface				
Access Controller	Advance Door opening				
Voice Announcement System	Door Nudging				
CCTV provision	Group Operation up to 8 Car group				
Parking Switch	Smart Call Allocation based on Load				
LCD TFT display	Elevator Lock from COP				
Second COP	Arrival Gong, Hall Lantern				
VIP Services	Attendant & Independent Operation				

Handrails:




E77001 Hairline St. St. Curved Handrail



E77002 Hairline St. St. Round Handrail

Cabin Flooring

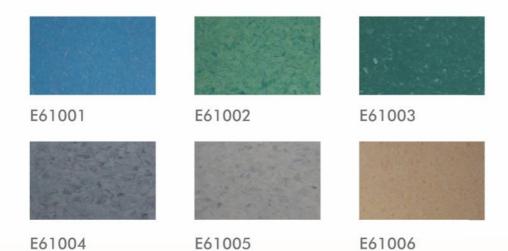



Powder Coated Shade for Car and Door Panels



Hoistway layout

Hoistway vertical layout

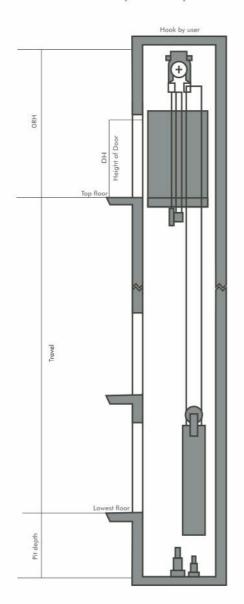


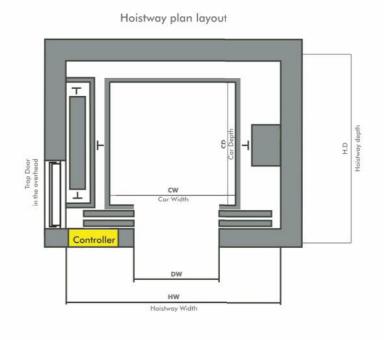


Ero-5-MRL

No. of person	Load in) (Kg	Car Width mm	Car Depth mm	Door Width mm	Hoist way Width mm	Hoist way Depth mm
6	408	1000	1100	700	1825	1500
8	544	1300	1100	800	2075	1500
10	680	1350	1300	800	2150	1625
13	884	1600	1350	900	2450	1700
15	1020	1600	1500	1000	2450	1820


Hoistway vertical layout

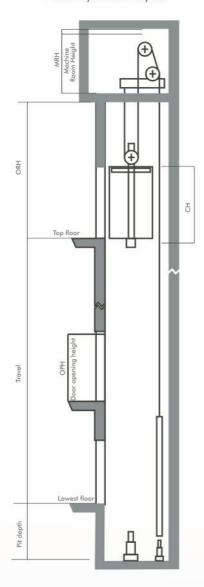

ESTD 1947




Hoistway plan layout



Ero-5-MR

No. of person	Load in (Kg)	Car Width mm	Car Depth mm	Door Width mm	Hoistway Width mm	Shaft Depth mm
6	408	1000	1100	700	1550	1550
8	544	1300	1100	800	1700	1550
10	680	1350	1300	800	1750	1750
13	884	1600	1350	900	2000	1900
15	1020	1600	1500	1000	2000	2050
16	1088	1600	1625	1000	2150	2100
20	1360	1800	1725	1000	2200	2200

Maintenance Service Toll Free Number 1800 833 0230

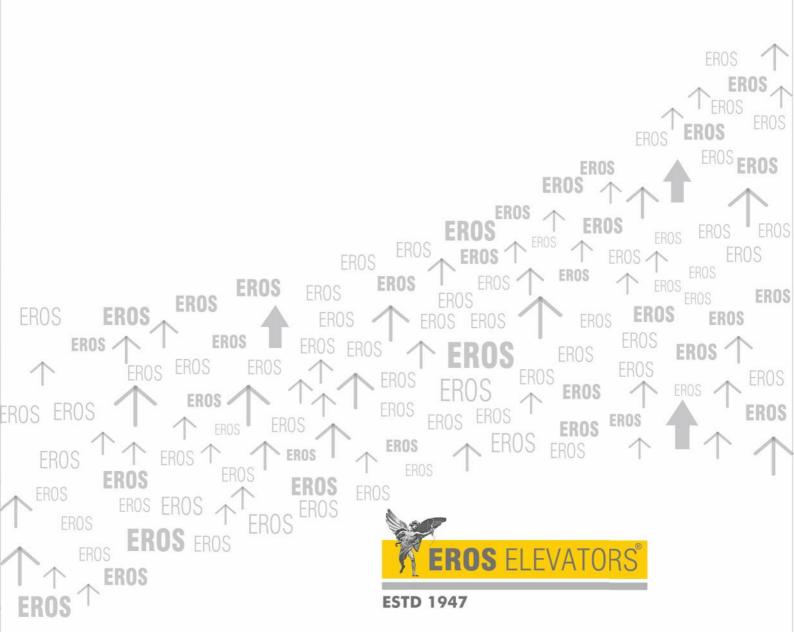

EROS ELEVATORS & ESCALATORS PRIVATE LIMITED

405, Bharat Ind. Estate, Tokarshi Jivraj Road, Sewree (W), Mumbai - 400 015. INDIA.

Tel.: +91 22 2413 2425, 2414 3231 Fax: +91 22 2415 3192

Email: info@eroselevators.com CIN NO.: U31909MH2010PTC200179

http://www.eroselevators.com

Note: Because of restrictions in printing technology, there will be slight difference between colors in this catalogue & actual.

The brochure is only for your reference. Please refer to the respective technical documents as items may change due to continuous improvement.